

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L. L. P.

1300 I STREET, N. W.
WASHINGTON, DC 20005-3315

202 • 408 • 4000
FACSIMILE 202 • 408 • 4400

ATLANTA
404•653•6400
FALO ALTO
650•849•6600

66793 U.S. PTO



04/02/98

WRITER'S DIRECT DIAL NUMBER:

(202) 408-4096

April 2, 1998

TOKYO
011•813•3431•6943
BRUSSELS
011•322•646•0353

ATTORNEY DOCKET NO.: 03586.0013

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

New U.S. Patent Application

Title: DOWNLOADING APPARATUS AND METHOD THEREOF FOR
DIGITAL BROADCAST RECEIVER

Inventors: Kwang Cheol JOO, Kuk Ho BAE and In Hun KIM

Sir:

We enclose the following papers for filing in the United States Patent and
Trademark Office in connection with the above patent application.

1. Application - 18 pages, including 5 independent claims and 28 claims total.
2. Drawings - 6 sheets of formal drawings, containing 6 figures.
3. Declaration and Power of Attorney.
4. Recordation Form Cover Sheet and Assignment to LG ELECTRONICS INC.
5. Certified copy of Korean Application Nos. 13657/1997 and 70750/1997, filed April 14, 1997 and December 19, 1997, respectively.
6. A check for \$1,440.00 representing a \$790.00 filing fee, \$164.00 for independent claims fee, \$176.00 for extra claims fee and \$270.00 for multiple dependent claims fee and \$40.00 for recording the Assignment.

Assistant Commissioner for Patents

April 2, 1998

Page 2

Applicants claim the right to priority based on Korean Application Nos. 13657/1997 and 70750/1997, filed April 14, 1997 and December 19, 1997, respectively.


Please accord this application a serial number and filing date and record and return the Assignment to the undersigned.

The Commissioner is hereby authorized to charge any additional filing fees due and any other fees due under 37 C.F.R. § 1.16 or § 1.17 during the pendency of this application to our Deposit Account No. 06-0916.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

By:



Ernest F. Chapman
Reg. No. 25,961

EFC/FPD/rgm
Enclosures

DOWNLOADING APPARATUS AND METHOD THEREOF FOR DIGITAL BROADCAST RECEIVER

BACKGROUND OF THE INVENTION

5

1. Field of the Invention

The present invention relates to a digital broadcast receiver, and more particularly to a downloading apparatus and a method thereof for a digital broadcast receiver, capable of downloading programs of a microcomputer.

10

2. Discussion of the background

Currently, most digital broadcast systems obey a MPEG standard, and a MPEGII system for broadcasts is divided into sections of a system, a video and an audio standard.

15

Among them, the system standard is to prescribe a time-multiplexed signal stream called a transport stream packet. There is a header at a start section of the transport stream packet, and packet identifier (PID) numbers are written in the header. The PID numbers which provide essential information for inverse multiplexing of time-multiplexed signal streams are identifying numbers indicating whether a current packet is a video, an audio or an additional information packet.

20

The video and audio standards for visual and audio signal streams which are respectively compressed by the MPEGII system. These signal streams are divided by the PIN numbers, and video, audio and additional informations become time-multiplexed and transmitted through several transport stream packets.

25

FIG. 1 is a block diagram of a general digital broadcast receiver for a TV.

As shown therein, the general digital broadcast receiver is provided with: a link unit 100 for detecting and correcting a quadrature phase shift keying (QPSK) signal or a quadrature amplitude modulation (QAM) signal, which is inputted through an antenna ANT, for thereby outputting a transport signal stream; a system decoder 110 for performing inverse-multiplexing of the transport signal stream from the link unit 100, that is for dividing the transport signal stream from the link unit 100 into video, audio and additional information signal streams; a video decoder 120 for expanding the video signal stream divided by the system decoder 110; an audio decoder 140 for expanding the audio signal stream divided by the system decoder 110; an encoder 130 for converting the video signal from the video decoder 120 to a luminance signal Y and a chrominance signal C to be displayed on a TV or a monitor; a D/A converter 150 for converting the digital audio signal from the audio decoder 140 to an analog audio signal; a microcomputer 160 for controlling functions of the additional information signal stream separated by the system decoder 110 or additional informations supplied from a user interface 190; a ROM 170 for storing a main program for driving the microcomputer 160; a RAM 180 for temporarily storing variables for an operation of the microcomputer 160; and a data bus and an address bus for receiving and transmitting data and address in each unit.

FIG. 2 illustrating a map of the ROM 170 in FIG. 1. As shown therein when power is applied to the ROM 170, the main program is instantly processed.

Now, an operation of the general digital broadcast receiver will be describe with reference to the accompanying drawings.

The link unit 100 detects and corrects the QPSK or QAM signal from the antenna ANT and outputs a resultant transport signal stream to the system decoder 110.

The system decoder 110 which receives the transport signal stream detects the PID numbers, that is inverse-multiplexing, for thus dividing into the video, audio and additional signal streams, and applies the video signal stream to the video decoder 120, the audio signal stream to the audio decoder 140 and the additional information stream to the microcomputer 160, respectively.

The video decoder 120 expands the video signal stream which is compressed by the MPEGII, and the encoder 130 converts the video signal from the video decoder 120 to the luminance signal Y and the chrominance signal C to be displayed on the TV or the monitor.

While, the audio decoder 140 expands the audio signal stream which is also compressed by the MPEGII, and the D/A converter 150 converts the digital audio signal supplied from the audio decoder 140 to an analog audio signal.

The microcomputer 160 performs a control operation in accordance with the main program stored in the ROM 170 in order to carry out a function which corresponds to the additional information signal from the user interface 190 such as a remote control, a function key, etc.. Here, the variables which are required for the operation of the main program are reserved in the RAM 180 and used whenever necessary.

However, when changing the main program stored in the microcomputer 160 in the digital broadcast receiver of the TV, for example, in a case of updating the program to receive any additional function or service, or changing the program due to discovery of bug therein, it is required to change the whole ROM in the digital broadcast receiver, for thereby giving much trouble to the TV user.

SUMMARY OF THE INVENTION

Accordingly, the present invention is directed to a digital broadcast receiver that obviates the problem due to the related art.

A first object of the present invention is to provide a downloading apparatus for a digital broadcast receiver and a method thereof for a digital broadcast receiver
5 that updates a main program of a microcomputer by broadcast.

A second object of the present invention is to provide a downloading apparatus for a digital broadcast receiver and a method thereof for a digital broadcast receiver that examines a main program before performing initializing a system, for thus a downloading mode is automatically selected when an incomplete
10 main program is stored.

A third object of the present invention is to provide a downloading apparatus for a digital broadcast receiver and a method thereof for a digital broadcast receiver that has a back-up memory for cases where power is off in the process of program downloading operation or an abnormal state occurs due to an unstable signal, for
15 thereby safely performing the program downloading operation.

Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the
20 written description and claims hereof as well as the appended drawings.

To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, a downloading apparatus for a digital broadcast receiver according to a first embodiment includes; a control means for receiving a addition information signal stream when receiving a
25 downloading mode, for thereby controlling a system to be updated with a

corresponding program; a first store means for temporarily storing a new program which is transmitted during a program downloading operation; and a second store means wherein a domain in which a previous program has been stored is updated with the new program in accordance with control of the control means.

5 A downloading method for a digital broadcast receiver applying the apparatus according to the first embodiment includes: selecting a downloading mode and receiving a new program name to be downloaded; receiving data corresponding to the program name; temporarily storing the received new program in a first memory; writing '0' in a version byte domain of a second memory wherein a program has
10 been stored; deleting a main program in a main program domain of the second memory; writing the new program which has been temporarily stored in the first memory in the main program domain; and writing a version number of the new program in the version byte domain.

In addition, a downloading method for a digital broadcast receiver according
15 to a second embodiment to achieve the second object of the present invention, includes: a first step for recognizing a version byte of a main memory wherein a main program is stored when system power is on; a second step for downloading a new program by which a downloading mode is automatically selected, when said version byte is '0'; and a third step for processing the main program which has been
20 stored, when said version byte is not '0'.

Further, in addition to the first embodiment, a downloading apparatus for a digital broadcast receiver according to a third embodiment to achieve the third object of the present invention further includes a third store means for backing up a new main program, and a downloading method thereof further includes backing up a new
25 program for which a downloading has been completed in a third store means.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide and further explanation of the invention as claimed.

5 BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the
10 description serve to explain the principles of the invention.

In the drawings:

FIG. 1 is a block diagram of a conventional digital broadcast receiver;

FIG. 2 is a map of a ROM in FIG.1;

FIG. 3 is a block diagram of a digital broadcast receiver according to the
15 present invention;

FIG. 4 is a map of a flash memory according to a preferable embodiment of the present invention;

FIG. 5 is a flowchart of a downloading process of a digital broadcast receiver according to a first embodiment of the present invention; and

20 FIG. 6 is a flowchart of a downloading process of a digital broadcast receiver according to a second embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

25 Reference will now be made in detail to the preferred embodiments of the

present invention, examples of which are illustrated in the accompanying drawings.

FIG. 3 is a block diagram of a digital broadcast receiver according to a preferable embodiment of the present invention.

5 As shown therein, a downloading apparatus for a digital broadcast receiver according to the present invention includes a microcomputer 260 for controlling an overall operation of a system to initialize the system and carry out a bootstrap and a downloading processes, a RAM 260 for temporarily storing a new main program transmitted from a system decoder 110 in a down mode in accordance with the control of the microcomputer 260, and a flash memory 270 for storing main, bootstrap and downloading programs in accordance with the control of the microcomputer 260.

10 The elements which are the same as those of the conventional art are labelled with the same reference numbers, and the description thereof will be omitted.

15 FIG. 4 illustrates a map construction of the flash memory 270 in FIG. 3, provided with four domains storing a bootstrap program A, a downloading program B, a main program C and a version byte D.

Now, a downloading operation of the downloading apparatus for the digital broadcast receiver according a first embodiment of the present invention will be described.

20 In FIG. 5, when a system user inputs a key for the downloading operation through the user interface 190, the microcomputer 260 recognizes the key input (S10) and starts the downloading program B which is stored in the flash memory 270.

First, a message is displayed on a screen, instructing the user to input a PID number of a new main program to be downloaded (S11), on the assumption that the user knows the PID numbers.

When the user inputs the PID number of a specific program through the user interface 190 (S12), the microcomputer 260 temporarily stores packet data, corresponding to the input PID number which are transmitted from the system decoder 110, in the RAM 280 (S13).

A version number '0' is written in the version byte domain D of the flash memory 270 (S14), and the main program C in the flash memory is removed (S15).

The version number '0' indicates that the main program which has been stored in the flash memory 270 is deleted and a new program is downloaded. Thus, when the downloading operation is completed, a version number of a new program is written.

Next, the new main program which has been temporarily stored in the RAM 280 is written in the main program domain C (S16), and a corresponding version number thereto is re-written in the version byte domain D (S17).

Lastly, when the main program is updated, a system initialization is performed by which the whole system is reset in accordance with the new main program (S18), and then various functions required by the user may be carried out.

However, when the downloading operation is suspended due to power failure or signal transmission error while deleting the main program C in the flash memory 270 and re-writing the new program in the downloading process, that is during S14 to S16, there may occur erroneous program operation since the main program which has been stored and the new program is incomplete.

FIG. 6 illustrates a downloading process of a downloading apparatus for a digital broadcast receiver according to a second embodiment of the present invention in order to make up for

such problem due to the first embodiment of the present invention.

When power of a system is on (S20), the microcomputer 260 recognizes a version number of the version byte domain D in the flash memory 270 by firstly processing the bootstrap program A of the flash memory 270. Specifically, the microcomputer 260 reads the version byte D indicating the version number of the main program (S21), and when the version number is '0', it is determined that the main program C of the flash memory 270 has not been completed, and the microcomputer 260 performs the downloading program B which has been stored in the flash memory 270, for thereby automatically being switched into a downloading mode without any key input by the user (S23).

Here, since a downloading operation according to the second embodiment is the same as S11 to S18 in the process according to the first embodiment of the present invention, the detail description will be omitted.

Next, that the version number is not '0' after recognizing the version number (S22) is determined that the main program C stored in the flash memory 270 is complete, for thus the microcomputer 260 performs the system initialization in accordance with the main program C (S24), for thus various functions required by the user may be carried out.

As described above, the bootstrap and the downloading programs must be separately stored in the flash memory 270 in order to perform the automatic downloading operation according to the second embodiment of the present invention.

Further, to make provision for the case where an abnormal program is written due to various possible situations which may occur during the downloading operation of the main program, there is provided a downloading apparatus for a digital broadcast receiver according to a third embodiment of the present invention which

further includes a second flash memory 300 for backing up the flash memory 270 wherein the downloading has been completed.

In a downloading method of a digital broadcast receiver according to the third embodiment of the present invention, after the steps S10 to S17 have been carried
5 out, there is included an additional step wherein the second flash memory 300 backs up the new program which has been updated in the flash memory 270.

Thus, when any abnormal state occurs during the downloading operation, the system is rerun and that the version number which is written in the version byte domain D of the flash memory 270 is '0' indicates that the main program C stored
10 in the flash memory 270 is incomplete. Thus, the program which has been backed up in the second flash memory 300 is processed, for thereby operating a re-download of the new program in accordance with the requirement of the user or performing various functions.

As described above, the downloading apparatus for the digital broadcast
15 receiver according to the present invention has several advantages.

First, since it is possible to update a version by receiving the new main program of the microcomputer through the broadcast and thus it is possible to provide a new version program whenever needed, the user may continuously receive new services after purchasing a product.

20 In addition, according to the invention, the bootstrap operation is firstly operated when power is applied, for thus when an incomplete main program is stored due to various situations, the downloading mode is automatically selected and a new program may be downloaded or a program which has been backed up may be processed.

25 It will be apparent to those skilled in the art that various modifications and

variations can be made in the downloading apparatus and a method thereof for the digital broadcast receiver of the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What Is Claimed Is:

1. A downloading apparatus for a digital broadcast receiver, comprising:

5 a signal process means for performing inverse-multiplexing of a supplied broadcast signal, for thus separating said signal into a video signal stream, an audio signal stream and an additional information signal stream, respectively;

an input means for receiving a downloading mode selected by a user and a program name which will be downloaded;

10 a control means for receiving said additional information signal stream when receiving the downloading mode, for thereby controlling a system to be updated with a corresponding program;

a first store means for temporarily storing a new program which is transmitted during a program downloading operation; and

15 a second store means wherein a domain in which a program has been stored is updated with the new program in accordance with control of the control means.

2. The apparatus according to claim 1, wherein a packet identifier (PID) is used as said program name to be downloaded.

20 3. The apparatus according to claim 1, wherein the first store means is a RAM.

4. The apparatus according to claim 1, wherein the second store means comprises:

25 a version byte domain wherein a version number of the main program is

written;

a downloading program domain wherein a downloading program is stored in order to receive new data; and

a main program domain wherein the main program is stored.

5

5. The apparatus according to either claim 1 or claim 4, wherein the second store means is a flash memory.

6. A downloading method for a digital broadcast receiver, comprising:

10 selecting a downloading mode and receiving a new program name to be downloaded;

receiving data corresponding to said program name;

temporarily storing the received new program in a first memory;

writing '0' in a version byte domain of a second memory wherein a program

15 has been stored;

deleting a main program in a main program domain of said second memory;

writing the new program which has been temporarily stored in the first memory in the main program domain; and

writing a version number of the new program in the version byte domain.

20

7. The method according to claim 6, wherein a packet identifier (PID) is used as the program name to be downloaded.

8. The method according to claim 6, wherein the first memory is a RAM.

25

9. The method according to claim 6, wherein the second memory is a flash memory.

10. A downloading method for a digital broadcast receiver, comprising:

5 a first step for recognizing a version byte of a main memory wherein a main program is stored when system power is on;

a second step for downloading a new program by which a downloading mode is automatically selected, when said version byte is '0'; and

10 a third step for processing the main program which has been stored, when said version byte is not '0'.

11. The method according to claim 10, wherein the second step comprises:

receiving a new program name to be downloaded;

receiving data which corresponds to the new program name;

15 temporarily storing the received data corresponding to the new program in a RAM;

writing '0' in a version byte domain of the main memory wherein the main program has been stored;

deleting a main program in a main program domain of said main memory;

20 writing the new program which has been temporarily stored in the RAM in the main program domain of said main memory; and

writing a version number of the new program in the version byte domain.

12. The method according to claim 11, wherein a packet identifier (PID) is

25 used as the program name to be downloaded.

13. The method according to claim 11, wherein the main memory comprises:
a version byte domain wherein a version number of a main program;
a downloading program domain wherein a downloading program is stored to
5 receive new data; and
a main program domain wherein the main program is stored.

14. The method according to either claim 11 or claim 13, wherein the main
memory is a flash memory.

15. A downloading apparatus for a digital broadcast receiver, comprising:
a signal process means for performing inverse-multiplexing of a supplied
broadcast signal, for thereby separating said signal into a video signal stream, an
audio signal stream and an additional information signal stream, respectively;
15 an input means for receiving a downloading mode selected by a user and a
program name which will be downloaded;

a control means for receiving said addition information signal stream when
receiving the downloading mode, for thereby controlling a system to be updated with
a corresponding program;

20 a first store means for temporarily storing a new program which is transmitted
during a program downloading operation;

a second store means wherein a domain in which a program has been stored
is updated with the new program in accordance with control of the control means;
and

25 a third store means for backing up the new program for which the

downloading operation has been completed.

16. The apparatus according to claim 15, wherein a packet identifier (PID) is used as said program name to be downloaded.

5

17. The apparatus according to claim 15, wherein the first store means is a RAM.

18. The apparatus according to claim 15, wherein the second store means is a flash memory.

10

19. The apparatus according to claim 15, wherein the third second store means is a flash memory.

15

20. A downloading method for a digital broadcast receiver, comprising:

selecting a downloading mode and receiving a new program name to be downloaded;

receiving data corresponding to said program name;

temporarily storing the received new program in a first memory;

20

writing '0' in a version byte domain of a second memory wherein a program has been stored;

deleting a main program in a main program domain of said second memory;

writing the new program which has been temporarily stored in the first memory in the main program domain;

25

writing a version number of the new program in the version byte domain; and

backing up the new program for which the downloading has been completed in a third memory.

21. The method according to claim 20, wherein when the program
5 downloading operation is suspended due to an abnormal situation, after the system is rerun, an re-downloading operation is operated by processing the program which has been backed up in the third memory.

22. The method according to claim 21, wherein the abnormal situation is
10 recognized by which '0' is written in the version byte domain of the second memory.

23. The method according to claim 20, wherein a PID is used as the program name to be downloaded.

24. The method according to claim 20, wherein the first memory is a RAM.
15

25. The method according to claim 20, wherein the second memory is a flash memory.

26. The method according to claim 20, wherein the third memory is a flash
20 memory.

ABSTRACT OF THE DISCLOSURE

The present invention relates to a downloading apparatus and a method thereof for a digital broadcast receiver for a digital broadcast receiver that updates a main program of a microcomputer by broadcast, and examines a main program before
5 performing initializing a system, for thus a downloading mode is automatically selected when an incomplete main program is stored, and has a back-up memory for cases where power is off in the process of program downloading operation or an abnormal state occurs due to an unstable signal, for thereby safely performing the
10 program downloading operation.

FIG. 1
CONVENTIONAL ART

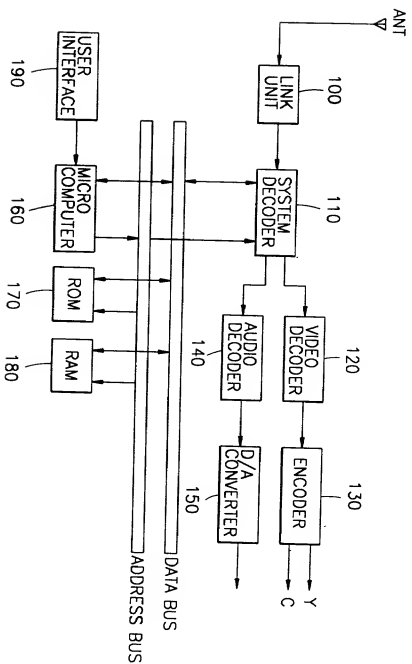


FIG. 2
CONVENTIONAL ART




FIG. 3

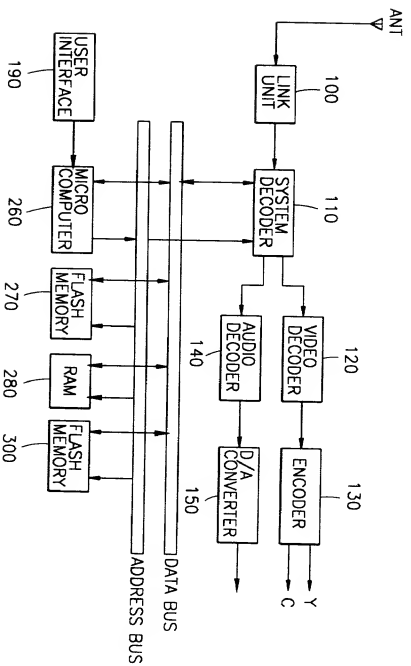


FIG. 4




FIG. 5


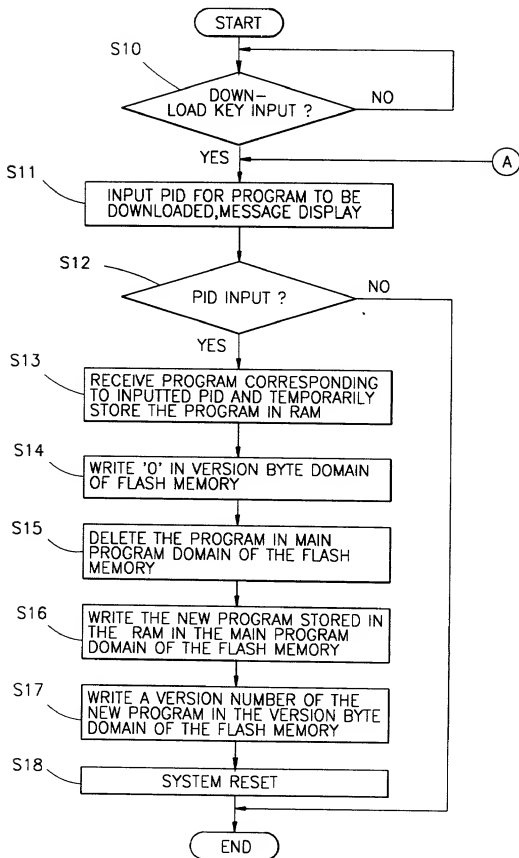


FIG. 6

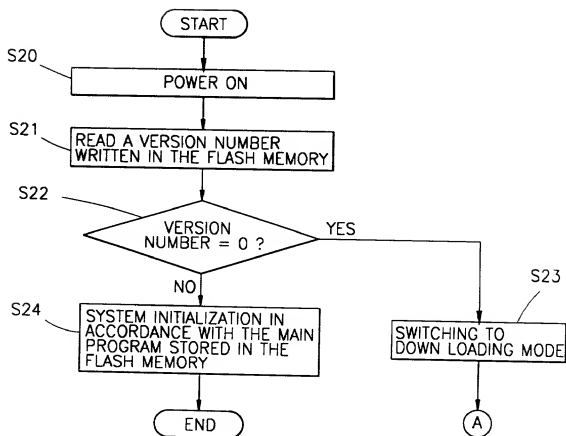

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: DOWNLOADING APPARATUS AND METHOD
THEREOF FOR DIGITAL BROADCAST RECEIVER

the specification of which is attached and/or ☐ was filed on _____ as United States Application Serial No. _____ or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT International application(s) designating at least one country other than the United States, listed below and have also identified below, any foreign application(s) for patent or inventor's certificate, or any PCT International application(s) having a filing date before that of the application(s) of which priority is claimed:

Country	Application Number	Date of Filing	Priority Claimed Under 35 U.S.C. 119
Korea	13657/1997	April 14, 1997	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
Korea	70750/1997	December 19, 1997	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

Application Number	Date of Filing

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) or § 365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application(s) and the national or PCT International filing date of this application:

Application Number	Date of Filing	Status (Patented, Pending, Abandoned)

I hereby appoint the following attorney and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: **FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.**, Reg. No. 22,540, Douglas B. Henderson, Reg. No. 20,291; Ford F. Farabow, Jr., Reg. No. 20,630; Arthur S. Garrett, Reg. No. 20,338; Donald R. Dunner, Reg. No. 19,073; Brian G. Brunsvoild, Reg. No. 22,593; Tipton D. Jennings, IV, Reg. No. 20,645; Jerry D. Voight, Reg. No. 23,020; Laurence R. Heffer, Reg. No. 22,610; Michael E. Payne, Reg. No. 23,098; Herbert H. Mintz, Reg. No. 26,691; C. Larry O'Rourke, Reg. No. 26,014; Albert J. Santorelli, Reg. No. 26,331; Bruce C. Zetter, Reg. No. 26,587; Richard H. Smith, Reg. No. 20,609; Stephen L. Peterson, Reg. No. 26,325; John M. Romary, Reg. No. 26,331; Bruce C. Zetter, Reg. No. 26,587; Richard H. Smith, Reg. No. 27,932; Allen M. Sokal, Reg. No. 26,695; Robert D. Bajefsky, Reg. No. 25,387; Richard L. Stroup, Reg. No. 28,478; David W. Hill, Reg. No. 28,220; Thomas L. Irving, Reg. No. 28,619; Charles E. Lipsey, Reg. No. 28,165; Thomas W. Winland, Reg. No. 27,605; Basil J. Lewis, Reg. No. 28,818; Martin I. Fuchs, Reg. No. 28,508; E. Robert Yoches, Reg. No. 30,120; Barry W. Graham, Reg. No. 29,924; Susan Haberman Gniffen, Reg. No. 30,953; Kenneth J. Racine, Reg. No. 30,415; Thomas H. Jenkins, Reg. No. 30,857; Robert E. Converse, Jr., Reg. No. 27,432; Clair X. Mullen, Jr., Reg. No. 20,348; Christopher P. Foley, Reg. No. 31,354; John C. Paul, Reg. No. 30,413; Roger D. Taylor, Reg. No. 28,992; David M. Kelly, Reg. No. 30,933; Kenneth J. Meyers, Reg. No. 25,146; Carol P. Einaudi, Reg. No. 32,220; Walter Y. Boyd, Jr., Reg. No. 31,738; Steven M. Anzalone, Reg. No. 32,095; Jean B. Fordis, Reg. No. 32,984; Barbara C. McCurdy, Reg. No. 32,120; James K. Hammond, Reg. No. 31,964; Richard V. Burgujian, Reg. No. 31,744; J. Michael Jakes, Reg. No. 32,824; Dirk D. Thomas, Reg. No. 32,600; Thomas W. Banks, Reg. No. 32,719; Christopher P. Isaac, Reg. No. 32,616; Bryan C. Diner, Reg. No. 32,409; M. Paul Barker, Reg. No. 32,013; Andrew Chanhon Sonu, Reg. No. 33,457; David S. Forman, Reg. No. 33,694; Vincent P. Kovalick, Reg. No. 32,867; and _____

Please address all correspondence to FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P., 1300 I Street, N.W., Washington, D.C. 20005, Telephone No. (202) 408-4000.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full Name of First Inventor <u>Kwang Cheol JOO</u>	Inventor's Signature <u>Kwang Cheol Joo</u>	Date <u>3/23/98</u>
Residence <u>Kumi, Korea</u>	Citizenship <u>Rep. of Korea</u>	
Post Office Address <u>Daebaik Town Apt. 107-401, 540, Okkye-Dong, Kumi, Kyungsangbuk-Do, Korea</u>		

Listing of Inventors Continued on Page 2 hereof. ☒ Yes ☐ No

Full Name of Second Inventor Kuk Ho BAE	Inventor's Signature <i>Kuk Ho Bae</i>	Date 3/23/98
Residence Kumi, Korea		Citizenship Rep. of Korea
Post Office Address Dongwoo 3cha Apt. 103, 196-1, Hyungkok-Dong, Kumi, Kyungsangbuk-Do, Korea		
Full Name of Third Inventor In Hun KIM	Inventor's Signature <i>In Hun Kim</i>	Date 3/23/98
Residence Daegu, Korea		Citizenship Rep. of Korea
Post Office Address 235-1, Shinam 3-Dong, Dong-Ku, Daegu, Korea		
Full Name of Fourth Inventor	Inventor's Signature	Date
Residence		Citizenship
Post Office Address		
Full Name of Fifth Inventor	Inventor's Signature	Date
Residence		Citizenship
Post Office Address		
Full Name of Sixth Inventor	Inventor's Signature	Date
Residence		Citizenship
Post Office Address		
Full Name of Seventh Inventor	Inventor's Signature	Date
Residence		Citizenship
Post Office Address		
Full Name of Eighth Inventor	Inventor's Signature	Date
Residence		Citizenship
Post Office Address		
Full Name of Ninth Inventor	Inventor's Signature	Date
Residence		Citizenship
Post Office Address		
Full Name of Tenth Inventor	Inventor's Signature	Date
Residence		Citizenship
Post Office Address		